


# Priory School

Portsmouth, Hampshire

We were proud to work with Bohunt Education Trust, carrying out insulation upgrades, removing existing waterproofing, and installing new waterproofing systems and tiles were required across the entire school. The work was carried out over summer holidays to

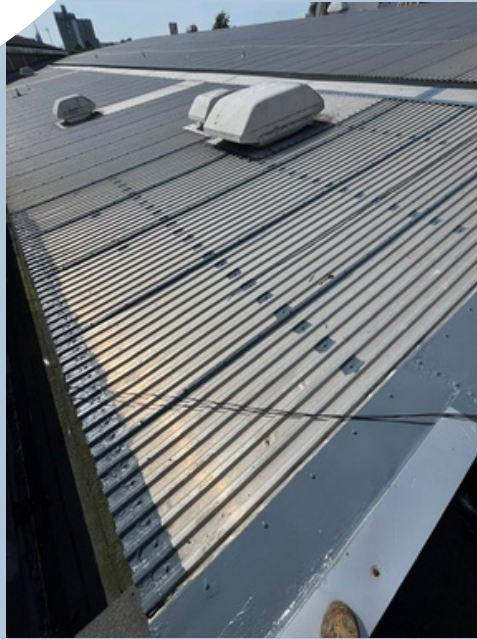

## Project Overview

Duration: 3 Months

Area: 2100m<sup>2</sup>

PROFILES XL Firesmart  
Liquid Waterproofing &  
Insulation replacement

25 Year Guarantee

Pitched & Flat



## Project Overview

Priory School  
Portsmouth, Hampshire

Duration: 3 Months

Area: 2100m<sup>2</sup>

PROFILES XL Firesmart  
Liquid Waterproofing &  
Insulation replacement

25 Year Guarantee

Pitched & Flat

## LIQUID WATERPROOFING



## Roofing System

Roof Area Reference

Roof Area(m<sup>2</sup>)

Deck

Substrate

Primer

Vapour Control Layer

Adhesive

Packerboard

Insulation

Baselayer

Underlay Primer

Underlay

Capsheet

Type of System

### Sports Hall

2000

Profiled Metal

Existing Profiled Metal Deck

BMI Icopal S.A. Spray Primer

TorchSafe T.A. VCL - Sanded

BMI Icopal Insulation Spray Adhesive

Not Required

Thermazone Roofboard 160mm


Not Required

BMI Icopal S.A. Spray Primer

TorchSafe T.A. Underlay Film

Profiles XL FireSmart Mineral Capsheet

PROFILES



Roof Area Reference

Roof Area(m<sup>2</sup>)

Deck

Substrate

Primer

Vapour Control Layer

Adhesive

Packerboard

Insulation

Baselayer

Underlay Primer

Underlay

Capsheet

Type of System

### Roof Area

100

Plywood

Existing Plywood/OSB

BMI Icopal S.A. Spray Primer

TorchSafe T.A. VCL - Sanded

BMI Icopal Insulation Spray Adhesive

Not Required

Thermazone Xtrafall Torch-on Board

Not Required

Not Required

Profiles Vent XL (Underlay)

Profiles XL FireSmart Mineral Capsheet

PROFILES

